

OPTICAL NETWORK VIDEO TECHNOLOGIES (SHENZHEN) CO.,
LTD.

Product Datasheet

6-Port Full Gigabit POE Switch

(ONV-POE33064P)



OVERVIEW

The ONV-POE33064P series is a full gigabit unmanaged PoE switch independently developed by ONV. It has 4*10/100/1000M POE ports+2*10/100/1000M uplink RJ45 ports. 1-4 ports support IEEE 802.3af/at standard PoE power supply. single port PoE power reaches 30W, and the maximum PoE output power is 65W(at-110W). As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to POE terminal equipment such as wireless AP, webcam, VoIP, visual intelligent building intercom through network cable, and meet the network environment that needs high-density PoE power supply. It is suitable for hotel, campus, factory dormitory and small and medium-sized enterprises.

Unmanaged model, plug and play, no configuration, easy to use.

FEATURE

■ Full gigabit access, full-line speed forwarding

- ◇ All series support all-line high-speed forwarding, user-flexibly flexible networking, to meet the needs of various scenarios networking;
- ◇ Support non-blocking wire speed forwarding .
- ◇ Support full duplex based on IEEE802.3x and half duplex based on backpressure .

■ Intelligent PoE power supply function

- ◇ 4*10/100/1000 Base-T RJ45 ports support PoE power supply to meet the needs of PoE power supply in security monitoring, teleconferencing systems, and wireless coverage.
- ◇ Conforms to the IEEE 802.3af/at PoE power supply standard, automatically recognizes PoE devices for power supply, without damaging non-POE devices. The maximum POE output power of the entire device reaches 65W(at-110W), and the maximum POE output power of a single port is 30 W.
- ◇ The PoE port supports the priority mechanism. When the remaining power is insufficient, the power supply of the high-priority port is preferentially guaranteed to prevent the device from being overloaded.

■ The equipment is stable and reliable

- ◇ The host has low power consumption, no fan mute design, aluminum alloy metal shel, excellent heat dissipation, and ensure stable operation of products.
- ◇ The equipment fully meets the requirements of CCC, CE, FCC and RoHS safety regulations, and is safe and reliable.
- ◇ ONV self-developed power supply, high redundancy design, provides long-term stable PoE power output.

■ Easy to operate


- ◇ Plug and play, no configuration, simple and convenient.
- ◇ The user can easily understand the working status of the device through the power indicator (PWR), port status indicator (Link), and POE operation indicator.

TECHNICAL SPECIFICATION

Model	ONV-POE33064P	ONV-POE33064P-at
Interface	4*10/100/1000Base-T PoE port (Data/Power) 2*10/100/1000Base-T uplink RJ45 ports (Data)	
POE port	Port1-4 can support POE @ IEEE802.3af/at	
Network Protocol	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T IEEE802.3x	
PoE Standard	IEEE802.3af/at	
Ethernet Port Feature	10/100/1000 Base-T(X),auto-sensing,full/half duplex MDI/MDI-X self-adaption	
Forwarding Mode	Store and Forward(Full Wire Speed)	
Switching Capacity	16Gbps (Non-blocking)	
Forwarding Rate@64byte	8.93Mpps	
MAC Address Table	8K	
Buffer Memory	2M	
Twisted Pair Transmission	10BASE-T:Cat3,4,5 UTP(≤100 meter); 100BASE-TX: Cat5 or later UTP(≤100 meter) ; 1000BASE-T:Cat5e or later UTP(≤100 meter)	
Power Supply Pin	Default: 1/2(+),3/6(-); Optional: 4/5(+),7/8(-)	
Max /Average Power Per Port	30W/15.4W	30W/30W
Total PWR / Input Voltage	65W (AC100-240V)	110W (AC100-240V)
Power Consumption	Standby:<5W; Full Load:<65W	Standby:<6W; Full Load:<110W
LED	Power Indicator: PWR (green); Data indicator: Link(yellow); POE indicator: PoE (green)	
Power Supply	External power supply AC100~240V 50-60Hz 1.1A	External power supply AC100~240V 50-60Hz 2.0A
Operation TEMP / Humidity	-20~+55°C; 5%~90% RH Non-condensing	
Storage TEMP /	-40~+75°C; 5%~95% RH Non-condensing	http://www.onvcom.com +86 0755 33376606


Humidity	
Dimension(L*W*H)	118*95*28mm
Net /Gross Weight	<0.35kg /<1.0kg
Installation Method	desktop type ,wall mounted
Port lightning protection / protection level	Port lightning protection : 4KV 8/20us; Protection level: IP30
Certification	CE mark, commercial; CE/LVD EN60950; FCC Part 15 Class B; RoHS;
Warranty	3 years , lifelong maintenance.

DIMENSION

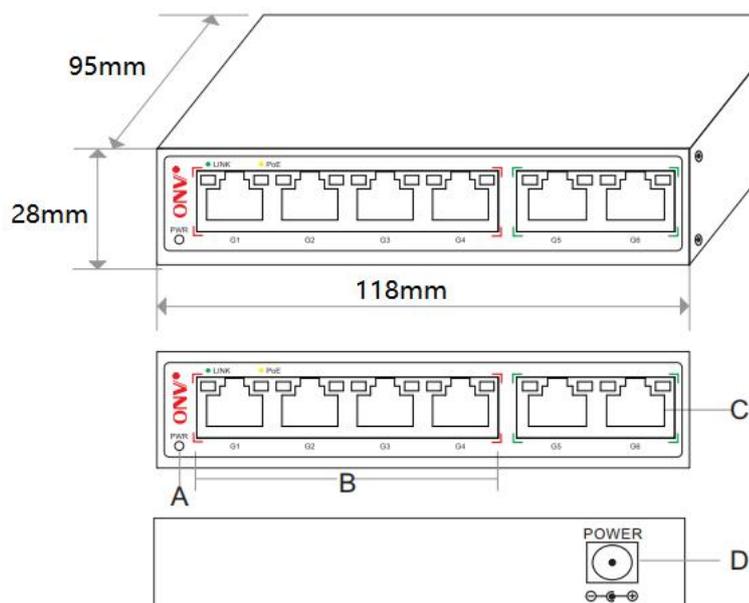

- A. Working indicator B. 4*10/100/1000M PoE ports
C. 2*10/100/1000M RJ45 ports D. DC power input port

APPLICATION

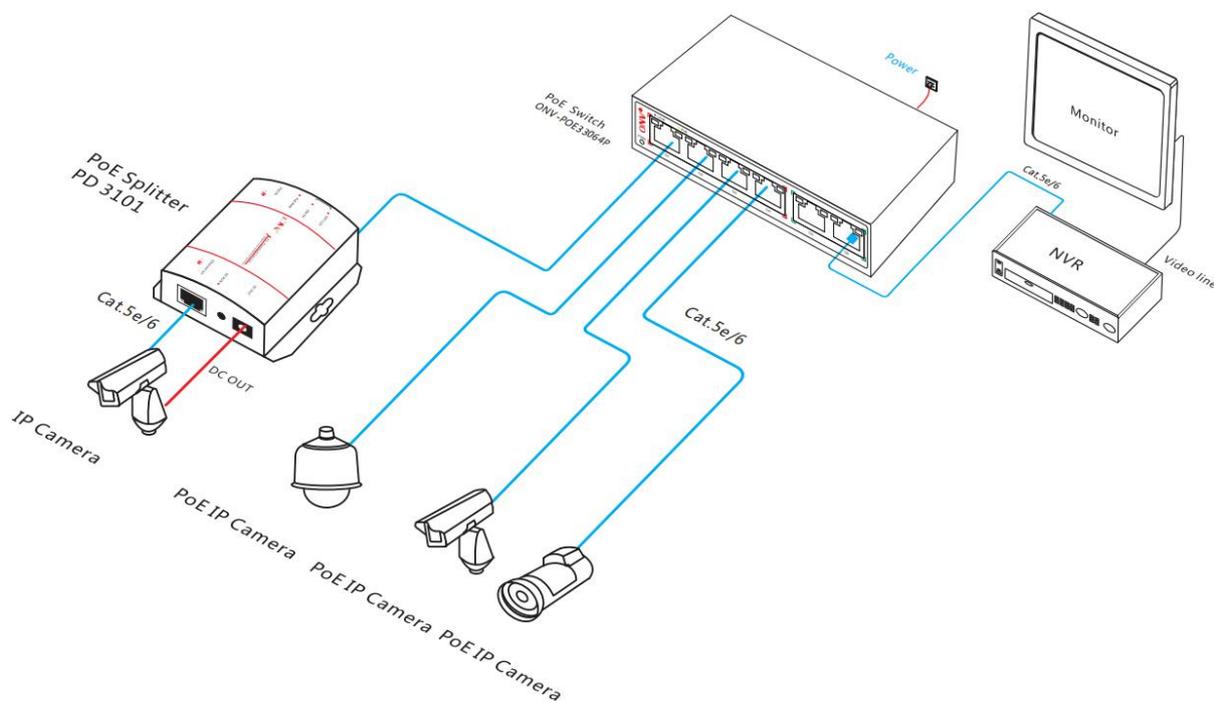

PACKING LIST

	CONTENT	QTY	UNIT
PACKING LIST	6-port full gigabit PoE switch (ONV-POE33064P/at)	1	SET
	AC power cable+ power adapter	1	SET
	Mounting Kits (Hanging Ear)	1	SET
	User guide	1	PC
	Warranty card	1	PC

ORDERING INFORMATION

Model	Description
ONV-POE33064P	Unmanaged PoE switch with 4*10/100/1000M PoE ports and 2*10/100/1000M uplink RJ45 ports. Port 1-4 can support IEEE 802.3af/at PoE standard, external 65W power supply .
ONV-POE33064P-at	Unmanaged PoE switch with 4*10/100/1000M PoE ports and 2*10/100/1000M uplink RJ45 ports. Port 1-4 can support IEEE 802.3af/at PoE standard, external 110W power supply .

SELECTION OF INFORMATION

Fiber Module Selection Table

Product	Model	Description	Unit
1.25G Fiber Module	ONV-2630	SFP optical module, 1.25G, multi mode dual fiber 850nm, transmission distance: 550m, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-2632	SFP optical module, 1.25G, single-mode dual fiber 1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-2612-T	SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-2613-R	SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, LC interface, support DDM function, support hot plug and pull.	PC
	ONV-2612-T-SC	SFP optical module, 1.25G, single-mode single fiber TX1310nm/RX1550nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull.	PC
	ONV-2613-R-SC	SFP optical module, 1.25G, single-mode single fiber TX1550nm/RX1310nm, transmission distance: 20km, SC interface, support DDM function, support hot plug and pull.	PC
Electric Module	ONV-2633	1.25G SFP optical module transfers to 10/100/1000M RJ45 net port.	PC

CONTACT US



OPTICAL NETWORK VIDEO TECHNOLOGIES (SHENZHEN) CO., LTD.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: onv@onv.com.cn

Website: www.onvcom.com

Zip: 518000

Headquarter Address: Room 1003, Block D, Terra Building, Futian district, Shenzhen, China

Factory Address: The 4-6th Floor, No. 59, HuaNing Road, Xinwei Community, Dalang Street, Longhua District, Shenzhen, China

